www.koigarten-mueller.de







Pressure type

Outdoor (Rainproof) use



Applications


- Septic tank (biological contact aeration)
- Bubble bath (air bubble injection)
- Oxygen supply for fish breeding

Dimensions





| | HP-20 | | |
|--------------------------|-------------|----|--|
| Rated voltage [V] | AC120 / 230 | | |
| Power frequency [Hz] | 50 | 60 | |
| Rated pressure [kPa] | 9.8 | | |
| Airflow volume [L/min] | 18 | 20 | |
| Power consumption [W] | 17 | | |
| Sound level [dBA] | 31 | | |
| Weight [kg] | 3.2 | | |

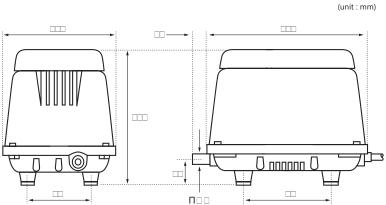

| Performance Curve | | — 501 | Hz - 60Hz - Rated pr | essure Pressure range for use |
|-------------------|----------|--------------|----------------------|-------------------------------|
| | 9.8 (5.0 | ~20.0) | | |
| | | | | |
| [L/min] | | | | |
| | | | | |
| | | [kPa] | | . |

- * All characteristics values are only for reference, and are not guaranteed values.
- * Note that the operating temperature for our pumps is 41°F(5°C) to 104°F(40°C).

